

Air Powered Tube Cleaner

AWT-100


The **compact and powerful** AWT-100 Air Powered Tube Cleaner is ideal for all types of tube cleaning applications where the use of electricity is not available or desirable. It features variable torque and speed controls to match the type of deposit in cleaning tubes/pipes 1/4" (6.4mm) I.D. and up. Flexible shafts and accessories are available for both wet or dry applications.

How It Works

The AWT-100 uses a cleaning tool mounted to the tip of a flexible shaft. For wet applications, the unit feeds water through the casing to the cleaning tool, flushing out deposits as they are loosened. For dry applications, the GTC-DPA Dry Pickup Attachment and a simultaneous vacuum are used to remove loosened deposits. (See pages 26 and 73 for details on the Dry Pickup Attachment and Vacuum.)

Features – Benefits

- Air powered – Shock resistant**
- Simple to operate – Minimal training required**
- Compact – Easy to carry**
- Speed/torque control – Set shaft rotation at optimum speed for each application**
- Interchangeable cleaning tools – Versatile**
- Simultaneous water flush or vacuum – Removes deposits**
- Foot switch activation – Safe operation**

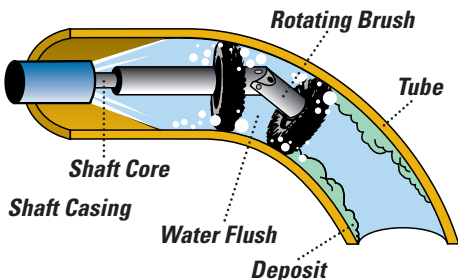

Three-Year Limited Warranty



Ideal for Cleaning Watertube Boilers

Specifications

- Flexible Shaft Speed:** Variable, 500-3,000 rpm
- Motor Power:** Up to 1½ HP depending upon air pressure and volume
- Air Requirements:** Minimum 60 PSI at 15 CFM, Maximum 100 PSI at 70 CFM
- Dimensions:** 10 3/8" high x 6" wide x 19" deep
- Weight:** 29 lbs net dry

AWT-100 Air Powered Tube Cleaner including adjustable speed/torque control, quick connect air and water fittings, and foot switch

ASH-B50-A Air Supply Hose

Note: See pages 22-34 for shafts and accessories.

Recommended:
GTC-705-4

Combination Air Lubricator, Filter and Regulator (see page 27)

